


# S10

smoothwall

## Hardware Specification and Operating Parameters

System Information			
<b>Processor</b>	Intel Xeon E5-2640v4 2.4GHz (10 Cores at 2.4 Ghz)	<b>Hard Disk</b>	WD Gold Re 2TB SATA 512N 6Gbps SATA3 7200RPM 128MB 3.5i (Optional: 2x HDD SW RAID)
<b>Chipset</b>	Intel® C612 chipset	<b>Other Interfaces</b>	4 x USB3, IPMI 2.0 interface, with virtual KVM support
<b>Ethernet</b>	6x Gigabit Ethernet (2 Onboard, 4 Port Silicom PCI w/bypass)	<b>Display</b>	Multi function front panel LCD display with 6 push buttons
<b>Memory</b>	16GB (4 x 4GB DDR4)	<b>Approvals</b>	FCC, CE, RoHS
Dimensions			
<b>Form Factor</b>	1U rack mountable appliance	<b>Depth</b>	369mm (14.5")
<b>Width</b>	437mm (17.2")	<b>Height</b>	43mm (1.7")

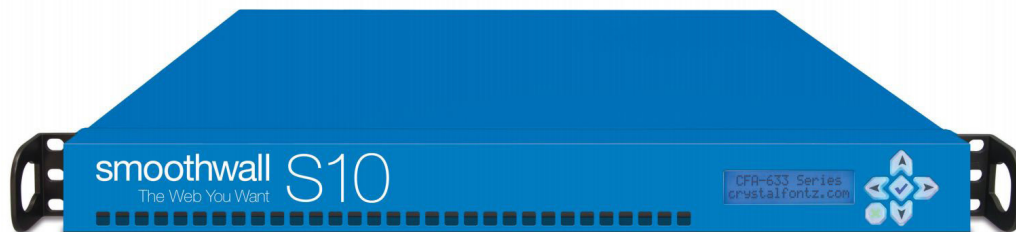

Power			
<b>Power Supply</b>	350W - Single PSU	<b>Frequency</b>	50-60Hz
<b>Voltage</b>	100-240v AC	<b>Rated Power</b>	TBA
Operating and Storage Environment			
<b>Operating Temperature</b>	5°C to 35°C (40°F to 95°F)		
<b>Storage Temperature</b>	-40°C to 70°C (-40°F to 158°F)		
<b>Humidity (operating)</b>	8% to 90% (non-condensing)		

The S10 closes the gap in **performance and price** between small and large organizations.

8008 Corporate Center Drive Ste 410  
Charlotte, NC 28226  
ussales@smoothwall.com

Call us today  
for a risk-free trial!

**1-800-959-3760**