


# S14

smoothwall

## Hardware Specification and Operating Parameters

System Information			
<b>Processor</b>	2 x Intel® Xeon® E5-2630v3 8 Core	<b>Other Interfaces</b>	2 x USB3, 1 x RS232, 1 x SVGA
<b>Chipset</b>	Intel® C612 chipset	<b>Hard Disk</b>	2 x 1TB SATA
<b>Ethernet</b>	6 x 1 Gbit Optional 2 x 10Gbit (Ethernet or SFP+)	<b>Display</b>	Multi function front panel LCD display with 6 push buttons
<b>Memory</b>	32GB DDR4	<b>Approvals</b>	FCC, CE, RoHS
Dimensions			
<b>Form Factor</b>	1U rack mountable appliance	<b>Depth</b>	650mm (25.6")
<b>Width</b>	437mm (17.2")	<b>Height</b>	43mm (1.7")

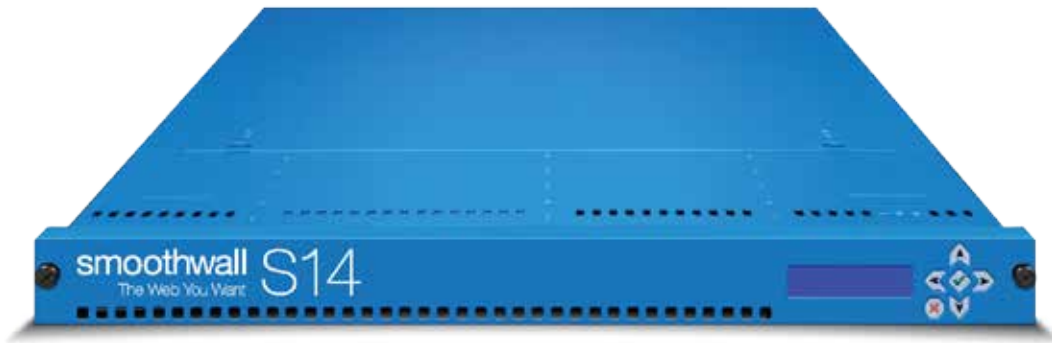

Power			
<b>Power Supply</b>	2 x 750W in a redundancy pair	<b>Frequency</b>	50-60Hz
<b>Voltage</b>	100-240v AC	<b>Rated Power</b>	700W @ 100-140v, 750W @ 200-240v
Operating and Storage Environment			
<b>Operating Temperature</b>	10°C to 35°C (50°F to 95°F)		
<b>Storage Temperature</b>	-40°C to 70°C (-40°F to 158°F)		
<b>Humidity (operating)</b>	8% to 90% (non-condensing)		

The S14 is Smoothwall's appliance **designed** to handle 10 gig connections.

8008 Corporate Center Drive Ste 410  
Charlotte, NC 28226  
ussales@smoothwall.com

Call us today  
for a risk-free trial!

**1-800-959-3760**